




ACTUATORS

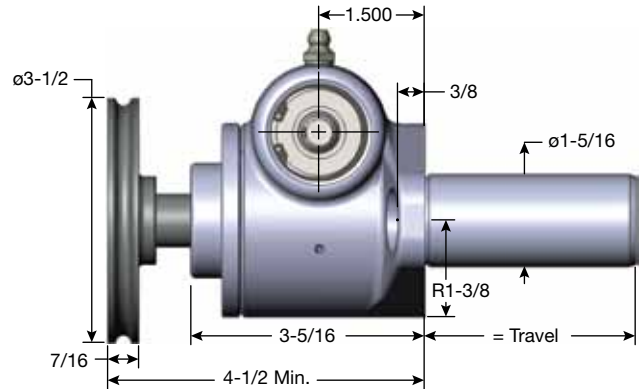

3/4 Diameter x .200 Lead Lifting Screws

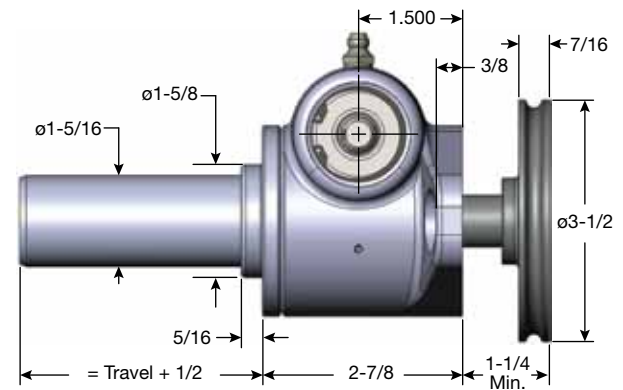

Threaded End

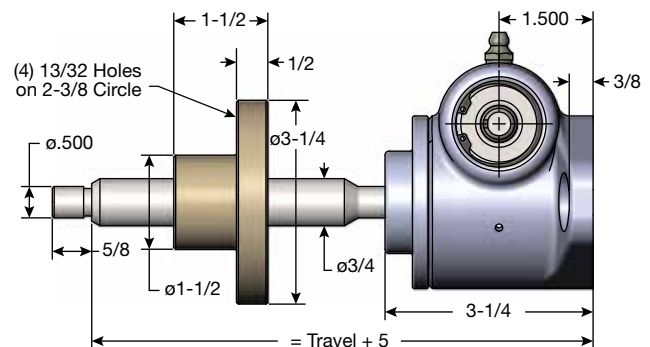

Double Clevis: CCM-2501

[illegible]

Note: Lifting screw is not keyed. Top should be secured to a lifting member to prevent rotation. When a Bellows Boot is required, see pages 148-149. Dimensions are subject to change without notice.