




版本

A

Output

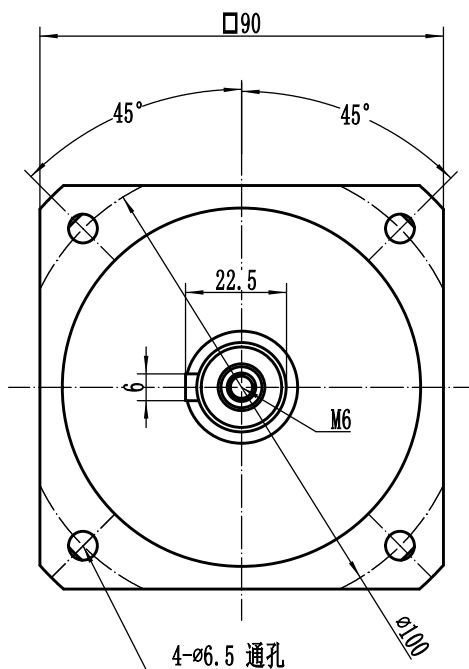

Input

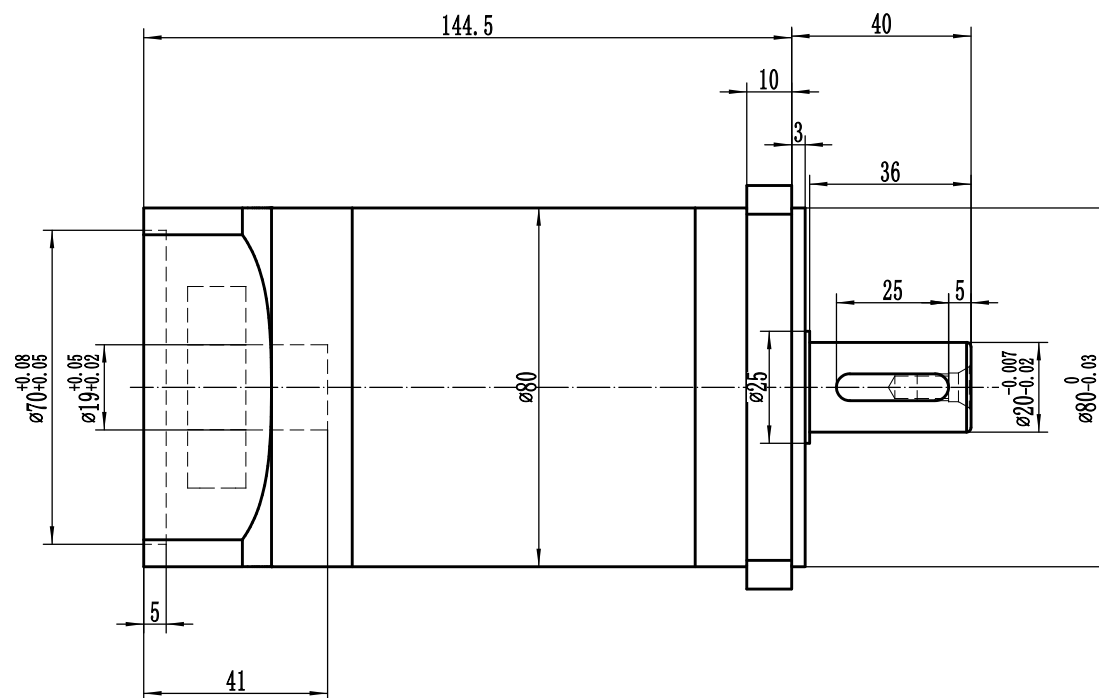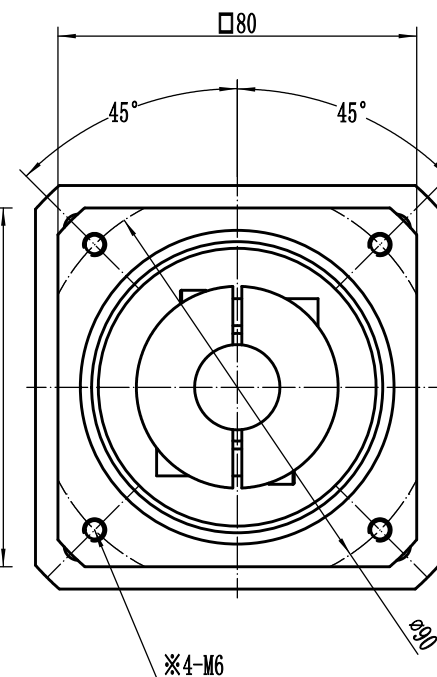

Ratio	12:1	15:1	16:1	20:1	25:1	28:1	30:1	35:1	40:1	50:1	70:1	100:1	未注公差				WPF080 Doule-stage reducer				WPF080-L2(750W) shape drawing			
Nominal Output torque	90Nm	110Nm	90Nm	110Nm	110Nm	90Nm	40Nm	110Nm	90Nm	110Nm	40Nm	22Nm	0.5-3	±0.1										
Allowable Axle force	400N												3-6	±0.1										
Allowable radial force	420N												6-30	±0.2	标记	处数	分区	更改文件号	签名	年、月、日	视角			
Norminal input speed	3500rpm												30-120	±0.3	设计			标准化			阶段标记	重量	比例	
backlash	P2≤12arcmin												120-400	±0.5	校对			批准					1:1	
Noise	≤63dB														审核						共	张	第	张
															工艺									

* continuous working life 10000h