




版本

A

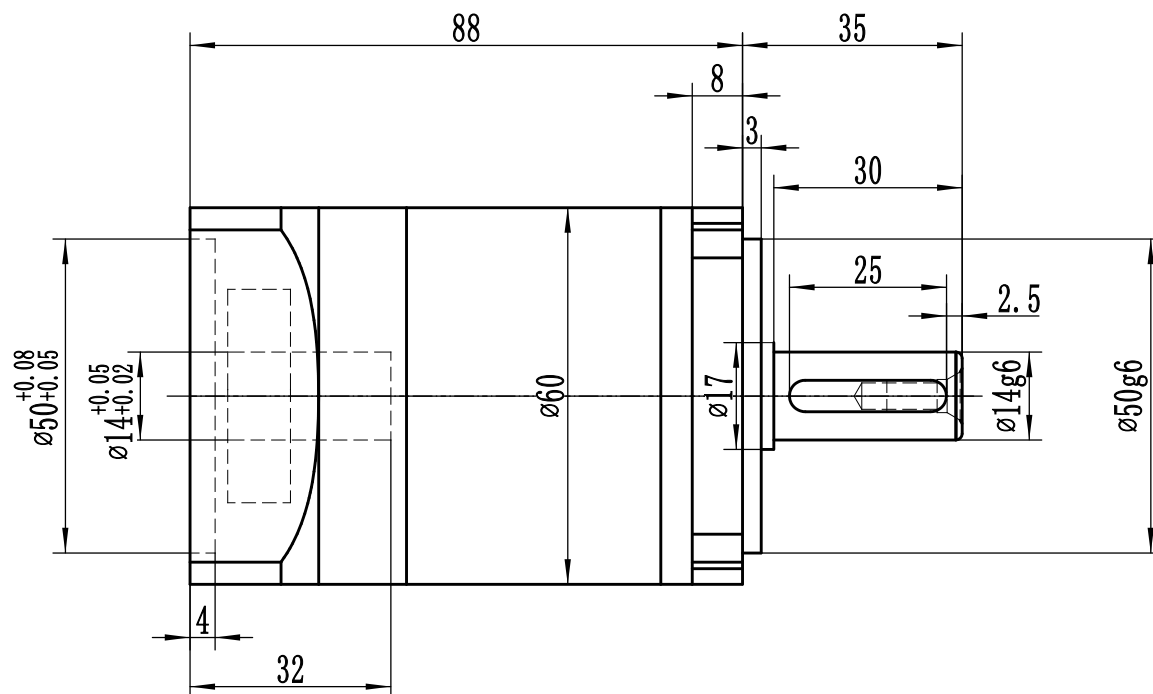


Output

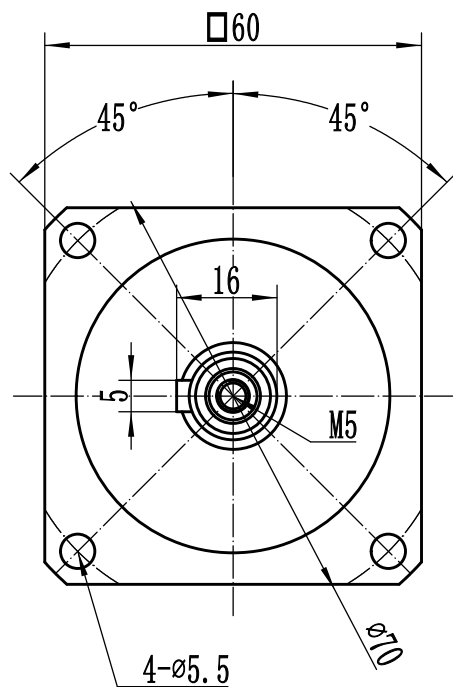

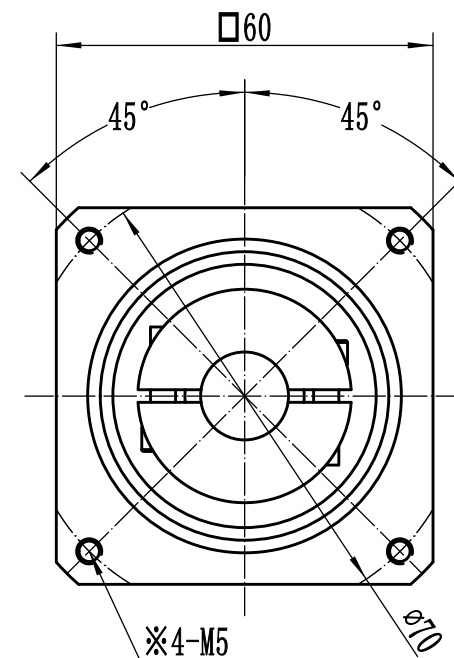Input



| Ratio                  | 3: 1        | 4: 1              | 5: 1           | 6: 1               | 7: 1                       | 8: 1   | 10: 1 |
|------------------------|-------------|-------------------|----------------|--------------------|----------------------------|--------|-------|
| Nominal Output torque  | 18Nm        | 36Nm              | 40Nm           | 20Nm               | 20Nm                       | 12Nm   | 12Nm  |
| Allowable Axle force   | 220N        | IP level          | IP65           | Lubrication        | Synthetic Lubrication oils | C20604 |       |
| Allowable radial force | 240N        | Service life      | 20000h*        | Torsional rigidity | 1.8Nm/arcmin               |        |       |
| Nominal input speed    | 4000rpm     | Mounting position | Any directions | Efficiency         | 96%                        |        |       |
| Backlash               | P2≤10arcmin |                   |                |                    |                            |        |       |
| Noise                  | ≤61dB       | Operating Temp    | -10℃~80℃       |                    |                            |        |       |

|                                    |      |    |    |    |       |    |       |             |   |   |   |          |  |
|------------------------------------|------|----|----|----|-------|----|-------|-------------|---|---|---|----------|--|
| 未注公差                               |      |    |    |    |       |    |       | WPF060单段减速机 |   |   | WPF060-L1(400W) New shape drawing   |          |  |
| 0.5-3                              | ±0.1 |    |    |    |       |    |       |             |   |   |   |          |  |
| 3-6                                | ±0.1 |    |    |    |       |    |       |             |   |   |   |          |  |
| 6-30                               | ±0.2 | 标记 | 处数 | 分区 | 更改文件号 | 签名 | 年、月、日 | 视角          |  |  |   |          |  |
| 30-120                             | ±0.3 | 设计 |    |    | 标准化   |    |       | 阶段标记        | 重量  | 比例  |  |          |  |
| 120-400                            | ±0.5 | 校对 |    |    | 批准    |    |       |             |   | 1:1   |   |          |  |
|                                    |      | 审核 |    |    |       |    |       |             |   |   | 1:1   | 2018-9-7 |  |
|                                    |      | 工艺 |    |    |       |    |       | 共           | 张   | 第   | 张   |          |  |
| 行星底座-WPF060-DZYT (M5)-(50270357) B |      |    |    |    |       |    |       |             |   |   |   |          |  |

\* 连续使用寿命 10000h