




版本


A

Output

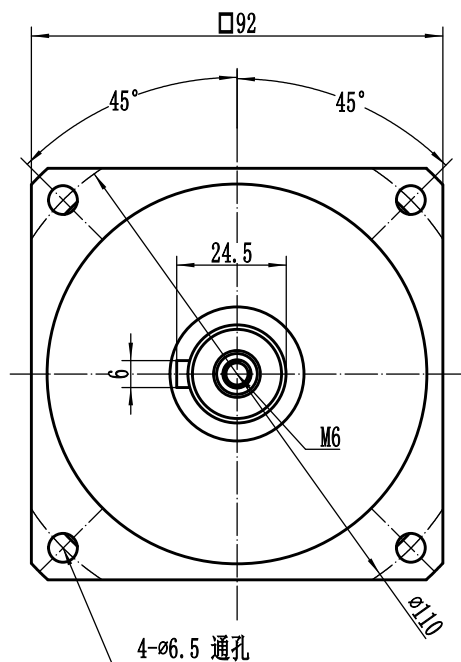

Input

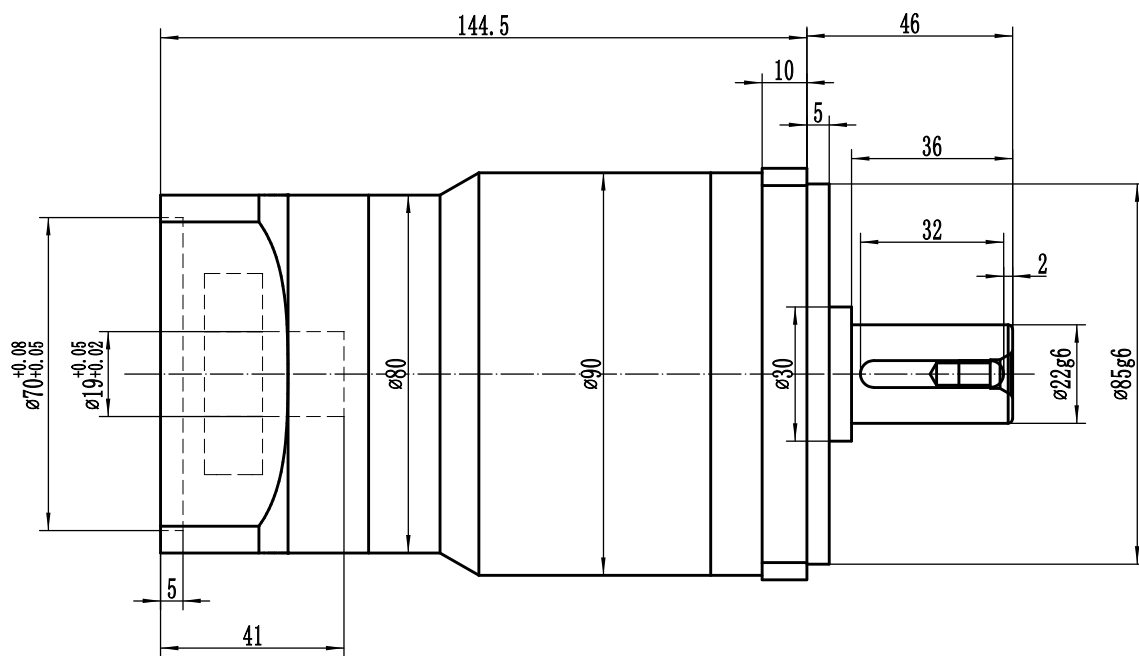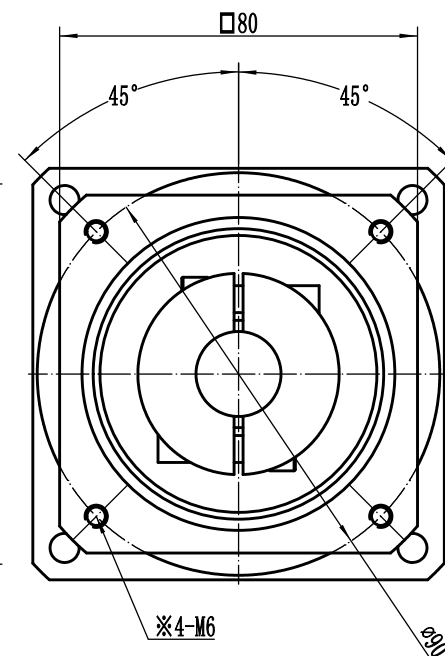

Ratio	12:1	15:1	16:1	20:1	25:1	28:1	30:1	35:1	40:1	50:1		70:1		100:1	未注公差							WPF090双段减速机			WPF090-L2(750W)New shape drawing			
Nominal Output torque	110Nm	125Nm	110Nm	125Nm	125Nm	110Nm	50Nm	125Nm	110Nm	125Nm		50Nm		32Nm	0.5-3	±0.1												
Allowable Axle force	430N		IP level		IP65		Lubrication		Synthetic Lubrication oils		C20807				6-30	±0.2	标记	处数	分区	更改文件号	签名	年、月、日	视角					
Allowable radial force	450N		Service life		20000h*		Torsional rigidity		4.85Nm/arcmin						30-120	±0.3	设计			标准化					阶段标记	重量	比例	
Nominal input speed	3500rpm		Mounting position		Any directions		Efficiency		93%						120-400	±0.5	校对			批准							1:1	
Backlash	P2≤12arcmin																审核								共	张	第	张
Noise	≤63dB		Operating Temp		-10℃~80℃												工艺								底座-WPF080-DZYT(M6)-(50270299)			

* 连续使用寿命 10000h