
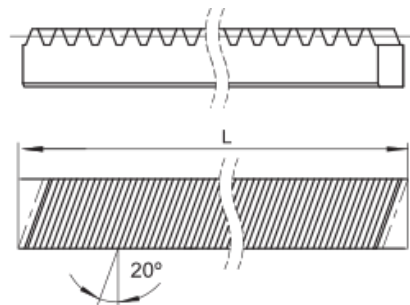
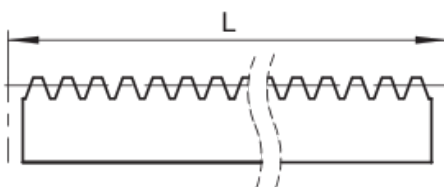



# Cremalheiras dentes retos ou helicoidal

| Módulo | Passo [mm] | b x he [mm] | hp [mm] | L [mm] | Peso [kg] |
|--------|------------|-------------|---------|--------|-----------|
| 1      | 3,1416     | 15 x 15     | 14      | 2000   | 3,10      |
| 1.5    | 4,7124     | 17 x 17     | 15      | 2000   | 4,10      |
| 2      | 6,2832     | 20 x 20     | 18      | 2000   | 5,50      |
| 2.5    | 7,8540     | 25 x 25     | 22,5    | 2000   | 8,00      |
| 3      | 9,4248     | 30 x 30     | 27      | 2000   | 13,00     |
| 4      | 12,5664    | 40 x 40     | 36      | 2000   | 22,00     |
| 5      | 15,7080    | 50 x 50     | 45      | 2000   | 32,00     |
| 6      | 18,8496    | 60 x 60     | 54      | 2000   | 49,00     |



|                         |         |
|-------------------------|---------|
| Ângulo de pressão       | 20°     |
| Precisão do passo       | 10h7    |
| Material                | Aço C45 |
| Perfil trefilado a frio | h11     |

|                                    |             |
|------------------------------------|-------------|
| Ângulo de inclinação (helicoidais) | 20° direita |
|------------------------------------|-------------|

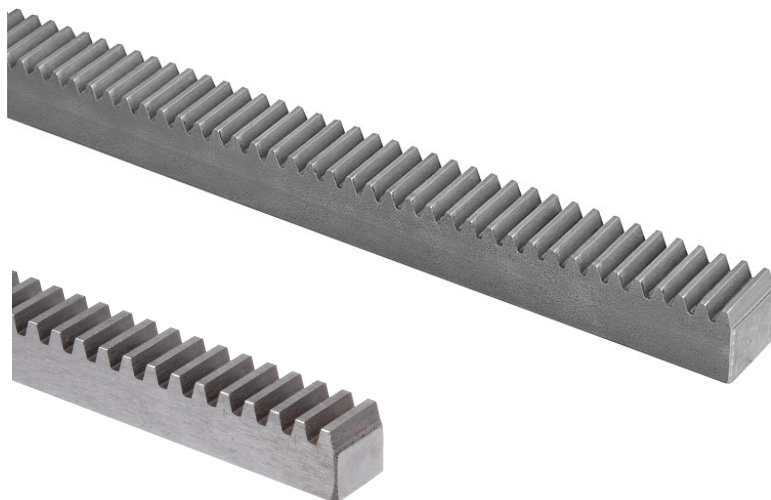

[www.kalatec.com.br](http://www.kalatec.com.br)