
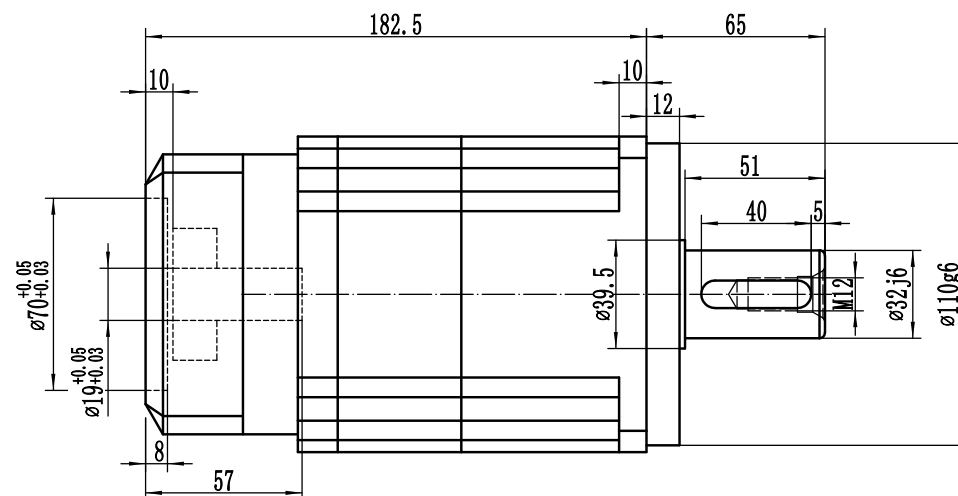



A

www.kalatec.com.br

Output

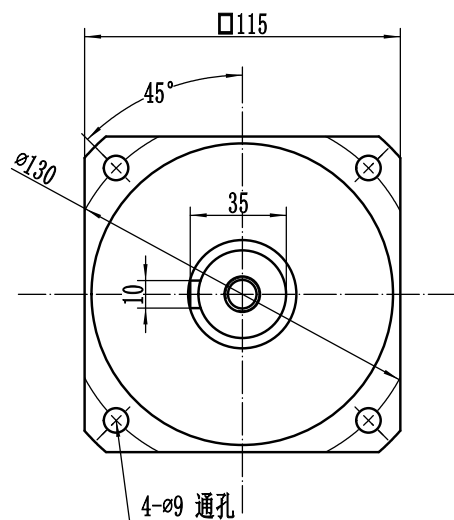

Input

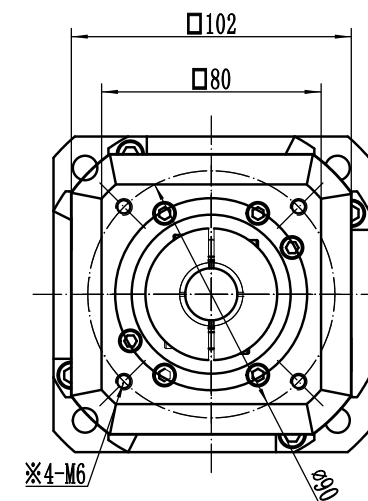

Ratio	15:1	20:1	25:1	30:1	35:1	40:1	50:1	60:1	70:1	80:1	100:1
Nominal Output torque	208Nm	290Nm	330Nm	310Nm	300Nm	260Nm	330Nm	300Nm	300Nm	230Nm	230Nm
Allowable Axle force	3350N		IP level		IP65	Lubrication		Synthetic Lubrication oils			
Allowable radial force	6700N		Service life		20000h *	Torsional rigidity		25Nm/arcmin			
Nominal input speed	4000rpm					Efficiency		94%			
Backlash	P1≤5arcmin		P2≤8arcmin			Mounting position		Any directions			
Noise	≤63dB		Operating Temp		-10℃~90℃						

* Continuous using life 10000h



WAB115 Gear Box				WAB115-L2 Drawing			
Viewing angle							
Stage Marker		Weight/Proportion					
		1:1.5					

2019/7/1