

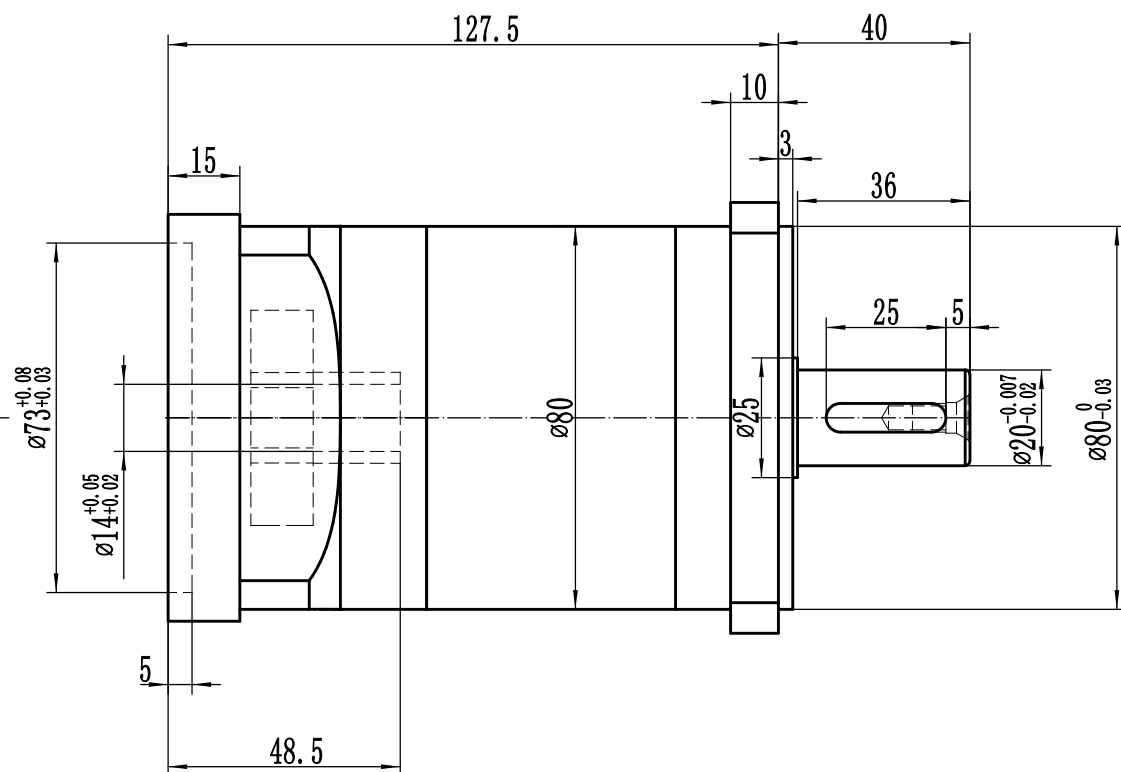


A

Output

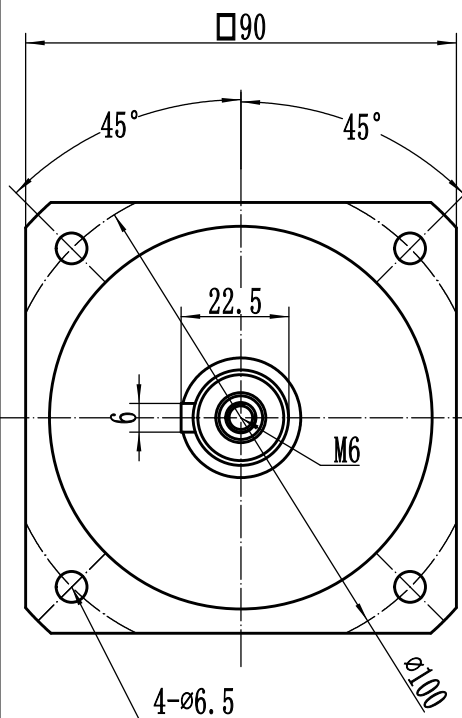

Input

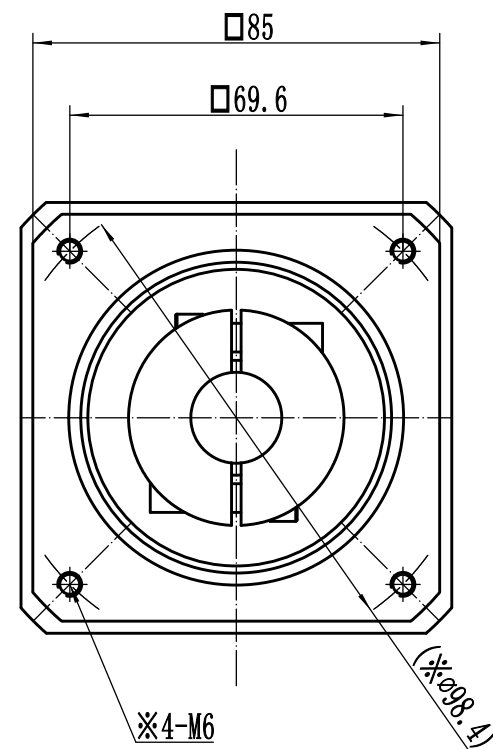

Ratio	3: 1	4: 1	5: 1	6: 1	7: 1	8: 1	10: 1
Nominal Output torque	40Nm	90Nm	110Nm	40Nm	40Nm	22Nm	22Nm
Allowable Axle force	400N	IP level	IP65	Lubrication	Synthetic Lubrication oils		
Allowable radial force	420N	Service life	20000h *	Torsional rigidity	4.7Nm/arcmin		
Nominal input speed	3500rpm	Mounting position	Any directions	Efficiency η	94%		
backlash	P2≤10arcmin						
Noise	≤63dB	Operating Temp	-10℃~80℃				

* continuous working life 10000h

WPF080 Gearbox				WPF080-L1		Drawing	
Viewing angle							
Stage Marker		Weight					
				1:1		ST34 - SHFAT 14mm	
				2019-4-25			