

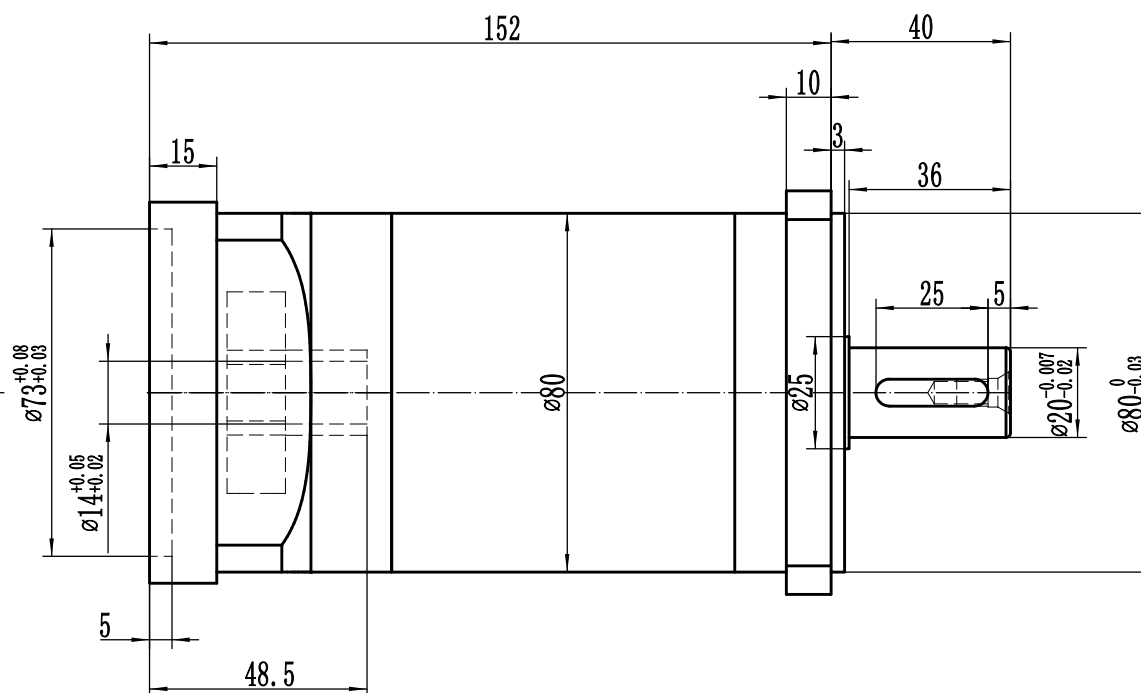


A

Output

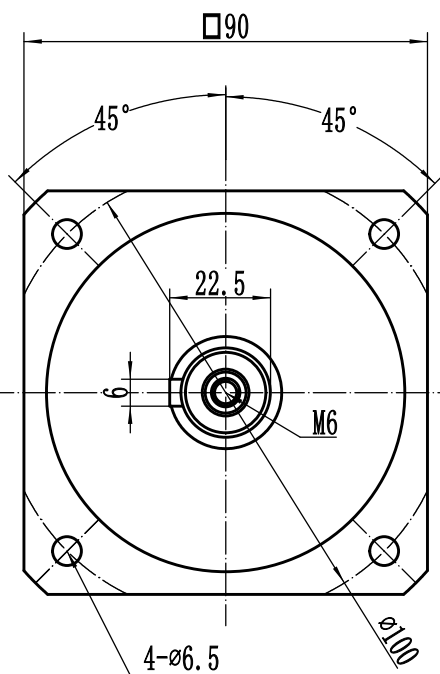

Input

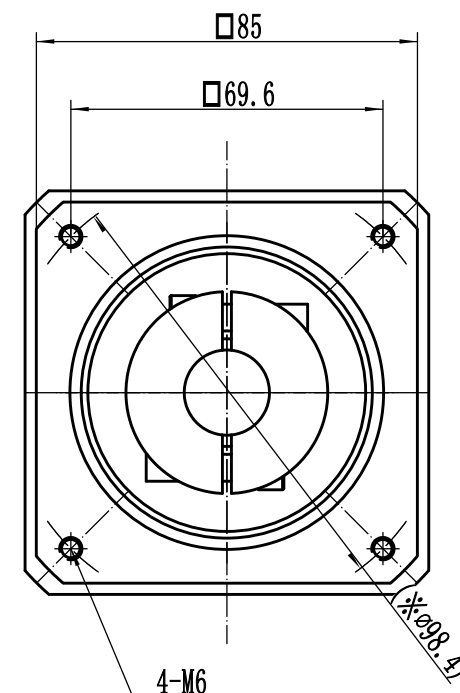

Ratio	12:1	15:1	16:1	20:1	25:1	28:1	30:1	35:1	40:1	50:1		70:1		100:1
Nominal Output torque	90Nm	110Nm	90Nm	110Nm	110Nm	90Nm	40Nm	110Nm	90Nm	110Nm		40Nm		22Nm
Allowable Axle force	400N		IP level		IP65		Lubrication		Synthetic Lubrication oils					
Allowable radial force	420N		Service life		20000h *		Torsional rigidity		4.7Nm/arcmin					
Normal input speed	3500rpm		Mounting position		Any directions		Efficiency η		91%					
backlash	P2≤12arcmin													
Noise	≤63dB		Operating Temp		-10℃~80℃									

* continuous working life 10000h

WPF080 Gearbox				WPF080-L2		Drawing	
Viewing angle							
Stage Marker		Weight		Proportion		ST34 - SHAT 14mm	
				1:1		2019-4-25	