


A

Output


Input

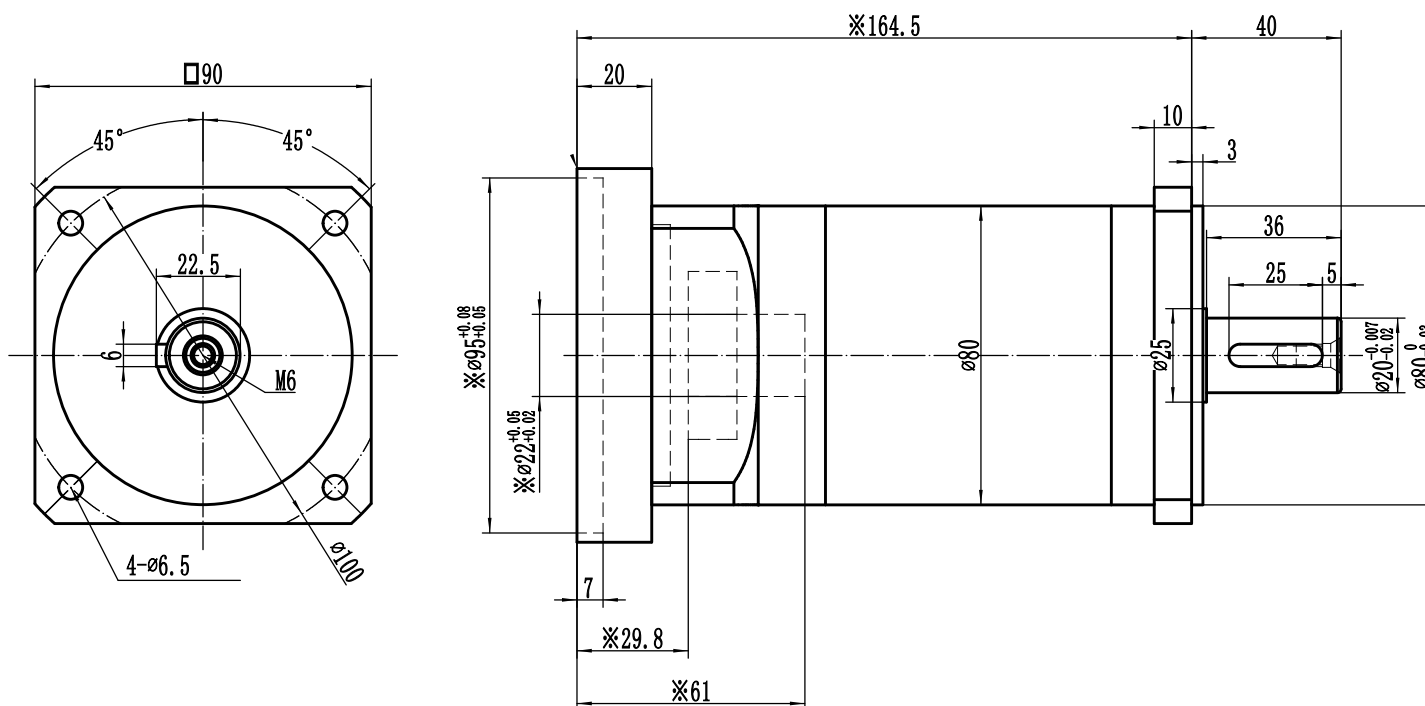

Ratio	12:1	15:1	16:1	20:1	25:1	28:1	30:1	35:1	40:1	50:1		70:1		100:1
Nominal Output torque	90Nm	110Nm	90Nm	110Nm	110Nm	90Nm	40Nm	110Nm	90Nm	110Nm		40Nm		22Nm
Allowable Axle force	400N		IP level		IP65			Lubrication		Synthetic Lubrication oils				
Allowable radial force	420N		Service life		20000h *			Torsional rigidity		4.7Nm/arcmin				
Nominal input speed	3500rpm		Mounting position		Any directions			Efficiency η		91%				
backlash	P2 \leq 12arcmin													
Noise	\leq 63dB		Operating Temp		-10℃ \sim 80℃									

* continuous working life 10000h

KALATEC
AUTOMAÇÃO

WPF080 Gearbox					WPF080-L2	
Viewing angle					WPF080-L2-C21010	
Stage Marker		Weight		Proportion		
				1:1		
					2019-4-24	